

07/17/98
Jc533 U.S. PTO

Please type a plus sign (+) inside this box [+]

PTO/SB/05 (12/97)

Approved for use through 09/30/00. OMB 0651-0032

Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

Jc551 U.S. PTO
09/118945
07/17/98

UTILITY PATENT APPLICATION TRANSMITTAL
(Only for new nonprovisional applications under 37 CFR 1.53(b))

Attorney Docket No. 042390.P4661 Total Pages 3
First Named Inventor or Application Identifier James T. Hurley
Express Mail Label No. EL034145335US

ADDRESS TO: **Assistant Commissioner for Patents**
Box Patent Application
Washington, D. C. 20231

APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

1. X Fee Transmittal Form
(Submit an original, and a duplicate for fee processing)
2. x Specification (Total Pages 31)
(preferred arrangement set forth below)
 - Descriptive Title of the Invention
 - Cross References to Related Applications
 - Statement Regarding Fed sponsored R & D
 - Reference to Microfiche Appendix
 - Background of the Invention
 - Brief Summary of the Invention
 - Brief Description of the Drawings (if filed)
 - Detailed Description
 - Claims
 - Abstract of the Disclosure
3. x Drawings(s) (35 USC 113) (Total Sheets 10)
4. Oath or Declaration (Total Pages)
 - a. Newly Executed (Original or Copy)
 - b. Copy from a Prior Application (37 CFR 1.63(d))
(for Continuation/Divisional with Box 17 completed) (**Note Box 5 below**)
 - i. DELETIONS OF INVENTOR(S) Signed statement attached deleting inventor(s) named in the prior application, see 37 CFR 1.63(d)(2) and 1.33(b).
5. Incorporation By Reference (useable if Box 4b is checked)
The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.
6. Microfiche Computer Program (Appendix)

12/01/97

PTO/SB/05 (12/97)

(if applicable, all necessary)

- ## ACCOMPANYING APPLICATION PARTS

- Approved for use through 09/30/00. OMB 0651-0032
Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

FEE TRANSMITTAL**TOTAL AMOUNT OF PAYMENT (\$)** 872.00

Complete if Known:

Application No. _____

Filing Date _____

First Named Inventor James T. Hurley

Group Art Unit _____

Examiner Name _____

Attorney Docket No. 042390.P4661**METHOD OF PAYMENT** (check one)

1. ☒ [X] The Commissioner is hereby authorized to charge indicated fees and credit any over payments to:

Deposit Account Number 02-2666
 Deposit Account Name _____

☒ [X] Charge Any Additional Fee Required Under 37 CFR 1.16 and 1.17

☐ [] Charge the Issue Fee Set in 37 CFR 1.18 at the Mailing of the Notice of Allowance, 37 CFR 1.131(b)

2. ☒ X Payment Enclosed
☒ X Check
 _____ Money Order
 _____ Other

FEE CALCULATION (fees effective 10/01/97)1. **FILING FEE**

Large Entity		Small Entity		Fee Description	Fee Paid
Fee Code	Fee (\$)	Fee Code	Fee (\$)		
101	790	201	395	Utility application filing fee	<u>790.00</u>
106	330	206	165	Design application filing fee	_____
107	540	207	270	Plant filing fee	_____
108	790	208	395	Reissue filing fee	_____
114	150	214	75	Provisional application filing fee	_____

SUBTOTAL (1) \$790.002. **CLAIMS**

		Extra	Fee from below	Fee Paid
Total Claims	<u>17</u>	- 20 = <u>0</u>	X <u>22.00</u>	= <u>0.00</u>
Independent Claims	<u>4</u>	- 3 = <u>1</u>	X <u>82.00</u>	= <u>82.00</u>
Multiple Dependent Claims			X _____	= _____

Large Entity		Small Entity		Fee Description	Fee Paid
Fee Code	Fee (\$)	Fee Code	Fee (\$)		
103	22	203	11	Claims in excess of twenty	_____
102	82	202	41	Independent claims in excess of 3	<u>82.00</u>
104	270	204	135	Multiple dependent claim	_____
109	82	209	41	Reissue independent claims over original patent	_____
110	22	210	11	Reissue claims in excess of 20 and over original patent	_____

SUBTOTAL (2) \$82.00

12/01/97

FEE CALCULATION (continued)

3. ADDITIONAL FEES


Large Entity		Small Entity		Fee Description	Fee Paid
Fee Code	Fee (\$)	Fee Code	Fee (\$)		
105	130	205	65	Surcharge - late filing fee or oath	
127	50	227	25	Surcharge - late provisional filing fee or cover sheet	
139	130	139	130	Non-English specification	
147	2,520	147	2,520	For filing a request for reexamination	
112	920*	112	920*	Requesting publication of SIR prior to Examiner action	
113	1,840*	113	1,840*	Requesting publication of SIR after Examiner action	
115	110	215	55	Extension for response within first month	
116	400	216	200	Extension for response within second month	
117	950	217	475	Extension for response within third month	
118	1,510	218	755	Extension for response within fourth month	
128	2,060	228	1,030	Extension for response within fifth month	
119	310	219	155	Notice of Appeal	
120	310	220	155	Filing a brief in support of an appeal	
121	270	221	135	Request for oral hearing	
138	1,510	138	1,510	Petition to institute a public use proceeding	
140	110	240	55	Petition to revive unavoidably abandoned application	
141	1,320	241	660	Petition to revive unintentionally abandoned application	
142	1,320	242	660	Utility issue fee (or reissue)	
143	450	243	225	Design issue fee	
144	670	244	335	Plant issue fee	
122	130	122	130	Petitions to the Commissioner	
123	50	123	50	Petitions related to provisional applications	
126	240	126	240	Submission of Information Disclosure Stmt	
581	40	581	40	Recording each patent assignment per property (times number of properties)	
146	790	246	395	For filing a submission after final rejection (see 37 CFR 1.129(a))	
149	790	249	395	For each additional invention to be examined (see 37 CFR 1.129(a))	
Other fee (specify) _____					
Other fee (specify) _____					

SUBTOTAL (3) \$0.00

*Reduced by Basic Filing Fee Paid

SUBMITTED BY:

Typed or Printed Name: Leo V. Novakoski

Signature:  Date: 7/17/98

Reg. Number 37,198 Deposit Account User ID 02-2666
(complete if applicable)

EXTENSION OF FAST PHONG SHADING TECHNIQUE FOR BUMP MAPPING

Background of the Invention

Technical Field This invention relates to the field of computer graphics, and in particular

to methods for implementing bump mapping in computer graphics.

Background Art Computer images having realistic three dimensional appearances (“3D images”) are becoming increasingly prevalent in games, multi-media, and other graphics-heavy software. The methods employed to generate 3D images require processing power that has only recently become available in personal computers. A standard method for generating a 3D image begins with sets of polygons that represent the surfaces of each object in the image. An object that has a moderately complex shape may require thousands of polygons to represent its surface, and an image that includes multiple objects may require tens or even hundreds of thousands of polygons. Illumination and orientation data for each of these polygons must be processed and converted to pixel level data to generate a 3D image on a computer monitor. A computer may have to process 50 million pixels ($\approx .5$ million polygons) per second to generate a 3D image that includes multiple objects of moderate complexity. This places a significant burden on the processing power of the computer.

Image processing is implemented by a 3D pipeline that typically includes a geometry stage and a rendering stage. In the geometry stage, the orientation of each polygon and the location of any light sources that illuminate the polygon are determined with respect to a reference coordinate system and specified by vectors associated with the polygon’s vertices.

This vertex data is transformed to a coordinate system (“camera coordinate system”) that facilitates viewing the image on a computer monitor and rotated to a desired orientation. In the rendering stage, the vertex data for each polygon is converted into the pixel level data necessary to represent the object on the computer monitor. Since there are tens to hundreds of pixels per polygon, rendering significantly slows the image generation process.

The two dimensional (2D) image on the computer monitor obtains its 3D appearance through lighting and perspective effects implemented by the graphics pipeline. The 3D appearance of an object depends significantly on the shading method used to assign color values to the pixels of the polygons. Realistic 3D images require relatively sophisticated shading methods that determine color values on a pixel by pixel basis. Consequently, these shading methods are implemented during the rendering stage of the pipeline.

The principal shading methods are, in order of increasing sophistication, flat shading, Gouraud shading, and Phong shading. Flat shading assigns the same color values to all the pixels in a polygon. Gouraud shading assigns color values to the pixels by interpolating from the color values at the vertices of the polygon. Phong shading assigns color values by interpolating a normal vector for each pixel from the normal vectors at the polygon vertices, and evaluating an illumination equation at each pixel using its interpolated normal vector. Phong shading and its variants are referred to as per-pixel shading methods, since the colors of an image are calculated for each pixel according to its orientation characteristics. These per pixel orientation characteristics are also necessary to implement bump mapping, which generates modified lighting features by perturbing the surface normal from its interpolated value.

Systems that generate fast, interactive graphics typically employ flat and Gouraud shading. These methods employ approximations in the rendering stage that are relatively cheap computationally, and the corresponding images can be generated in real time without elaborate graphics hardware. The images produced by these methods lack the lighting effects that distinguish quality 3D images, such as realistic specular highlights and diffuse light scattering. In addition, these methods are not amenable to bump mapping, since per pixel normal orientations are never determined. High end computer systems may include advanced rendering hardware to implement Phong shading. Even with high quality graphics hardware, the computational cost of Phong shading makes it difficult to generate real-time, interactive 3D images.

There is thus the need for a practical implementation of per-pixel shading methods that are suitable for use in real-time, interactive 3D graphics applications and may be implemented without the need for sophisticated graphics hardware.

Summary of the Invention

The present invention provides per-pixel shading that is fast enough for real time interactive graphics applications and may be implemented using standard graphics hardware.

In accordance with the present invention, color values are precalculated, collected in a color map, and referenced by orientation-dependent color variables. During rendering, per-pixel vector orientations are determined, modified according to a perturbation source, mapped to color

variables through a pair of angular coordinates, and pixel color values are provided by a corresponding entry in the color map.

Brief Description of the Drawings

5 The present invention may be understood with reference to the following drawings in which like elements are indicated by like numbers. These drawings are provided to illustrate selected embodiments of the present invention and are not intended to limit the scope of the invention.

10 Fig. 1 is shows the different vectors associated with a polygon to determine color values for the pixels of the polygon.

15 Fig. 2 is a flowchart representing an overview of a per-pixel shading method in accordance with the present invention.

20 Fig. 3 shows the angle coordinates used to represent the orientation of a vector in accordance with the present invention.

25 Fig. 4 is a color map comprising color values that are referenced through corresponding color variables.

30 Figs. 5A-5D are examples of color maps generated using the method of the present invention.

35 Figs. 6A-6E are images generated using Gouraud shading, Phong shading, and the method of the present invention.

Fig. 7 is a coordinates system suitable for specifying light and halfway vectors when the light source is local to a polygon surface.

Fig. 8 is a block diagram of a system for implementing the per-pixel shading method of the present invention.

Fig. 9 is a block diagram of the system of Fig. 6 modified to implement a bump mapping method in accordance with the present invention.

Figs 10-11 show images generated using a bump mapping method in accordance with the present invention.

Detailed Description of the Invention

The following discussion sets forth numerous specific details to provide a thorough understanding of the invention. However, those of ordinary skill in the art, having the benefit of this disclosure, will appreciate that the invention may be practiced without these specific details. In addition, various well known methods, procedures, and components have not been described in detail in order to focus attention on the features of the present invention.

Fig. 1 shows the different vectors that are associated with a polygon P for implementing various illumination models. In the following discussion, vectors and matrices are represented by bold capital letters. P is shown as a triangle for purposes of illustration with the understanding that any type of convex, planar polygon may be used to approximate the surface of an object. Vectors **N**, **L**, **V**, and **H** are shown for an arbitrary set of surface coordinates (s, t) on P. **N** is a unit vector that is normal to P at (s, t). **L** is a unit vector at (s, t) that points toward a

light source illuminating P. \mathbf{V} is a unit vector at (s, t) that points in the direction from which the object is viewed, e.g. the viewing or camera direction. \mathbf{H} is a vector that is halfway between \mathbf{L} and \mathbf{V} . When normalized, \mathbf{H} is given by $(\mathbf{V}+\mathbf{L})/|\mathbf{V}+\mathbf{L}|$. \mathbf{H} is convenient for determining the specular component of light at a surface location.

5 The three vertices of P are characterized by unit normals $\mathbf{N1}$, $\mathbf{N2}$, $\mathbf{N3}$. These normals indicate the orientation of P at each vertex and are specified by a set of cartesian coordinates (n_x , n_y , n_z). The vertex normals may be generated in the geometry stage of a graphics pipeline or, more typically, provided with a model of the object. Although not shown in Fig. 1, the vertices of P may also be characterized by values of \mathbf{L} and \mathbf{V} .

10 In Phong-type per-pixel shading methods, the orientations of vectors \mathbf{N} , \mathbf{L} , and \mathbf{H} are estimated for each pixel from their corresponding vertex values. An illumination model is evaluated at each pixel using the estimated vectors, and the resulting color value is assigned to the pixel for display on the computer monitor.

15 Equation (I) is representative of the illumination equations used to determine the color value of a pixel at a location (s,t).

$$C(s,t) = \sum_{j=0}^{N-1} \left(\frac{M_d L_{dj} + M_s L_{sj} \left(\mathbf{N}(s,t) \bullet \mathbf{L}_j(s,t) \right) + M_a L_{aj} \left(\mathbf{N}(s,t) \bullet \mathbf{L}_j(s,t) \right)^A}{D(s,t,j)} \right). \quad \text{Eq. (1)}$$

Here, M_d , M_s , and M_a are characteristics of the object material for diffuse, specular, and ambient light, respectively, and L_{dj} , L_{sj} , and L_{aj} are the diffuse, specular, and ambient components of light

source, L_j respectively. $D(s,t,j)$ is the distance between light source L_j and the pixel at s,t , and A is the specular exponent of the material.

Using Eq. (1) to generate a 3D image requires the repetition of a number of costly operations for each pixel of the image. Ignoring various approximations, \mathbf{N} , \mathbf{L} , and \mathbf{H} are estimated for each pixel from their corresponding vertex values. Eq. (1) is then evaluated for each pixel, using the estimated vectors. This entails evaluation of dot products ($\mathbf{N} \cdot \mathbf{L}$ and $\mathbf{N} \cdot \mathbf{H}$), one of which is raised to a power (A). In addition, interpolation does not preserve the unit length of the normal, so that square root and division operations must be implemented for each pixel normal.

The computational overhead of Eq. (1) is thus large, and when implemented in the rendering stage of the graphics pipeline, makes real time interactive graphics impractical. This overhead can be reduced through various approximations. For example, cosine, square root, and inverse functions can be evaluated using look-up tables, which sacrifice accuracy for speed. The orientations of \mathbf{L} and/or \mathbf{H} can be treated as constant across the polygon, when the separation between the object and the light source or the viewer (camera) is relatively large. The object can be illuminated and viewed from the same direction, so that \mathbf{L} and \mathbf{V} (and thus \mathbf{L} and \mathbf{H}) are parallel, and $\mathbf{N} \cdot \mathbf{L} = \mathbf{N} \cdot \mathbf{H}$. This is a relatively common geometry in video games. Even with these strategies, Eq. (1) is still evaluated real time for each pixel, significantly slowing down the rendering process. The loss of accuracy can also produce noticeable defects in the resulting images.

The present invention provides per-pixel shading that is suitable for generating 3D images in real-time, interactive applications, using commonly available graphics hardware. This

is accomplished by representing vector orientations through a pair of polar angle coordinates to simplify interpolation, scaling the angle coordinates to provide texture-like processing, and precalculating color values for a sample of normal vector orientations.. The color values are parameterized by one or more angle-dependent color variables, collected in a color map, and referenced by their corresponding color variables. The color map needs to be recalculated only when the geometry with which the object is lit or viewed changes.

During rendering, angle coordinates of a vector, e.g. **N**, **L**, **H**, are determined for each pixel by interpolation from the values at the polygon vertices. Interpolation of the angle coordinates eliminates the need to renormalize the vector at each pixel. In addition, normal perturbations (“bumps”) are readily incorporated into the rendering process in the form of perturbations to the angle coordinates. The angular coordinates (with or without perturbations) are converted to color variables, which map the vector orientations to a two dimensional array. The color variables reference illumination data in the color map that is appropriate for the relative light, camera, and normal vector orientations at the pixels. Thus, color values may be provided during the rendering stage using a relatively fast look-up procedure. This approach may be used to shade objects for any number of light sources, and it may be used whether the light source(s) are near the object (local) or “infinitely” distant from the object (non-local). It may also be used whether the camera is local or non-local.

Fig. 2 provides an overview of a method in accordance with the present invention for implementing per-pixel shading. At step 210, one or more color maps are generated, according to the properties of the object and the one or more light sources that illuminate it. Angle coordinates are then generated 220 for **L**, **H**, and **N** at the vertices of a polygon. Steps 210 and

220 are typically implemented prior to rendering. During rendering, angle coordinates are estimated 230 for the pixels of the polygon and converted 240 to color variables. A color value is assigned 250 to the pixel from the one or more color maps according to its color variable(s). If more polygons remain to be processed 260, vertex data for the next polygon is retrieved 270 and steps 230-260 are repeated. If no more polygons remain 260, processing for the object is done 270.

A detailed embodiment of the present invention is discussed first for the case in which the light source is non-local and the object is illuminated and viewed from the same direction (\mathbf{L} and \mathbf{V} are parallel). The modifications are then discussed for cases where \mathbf{V} and \mathbf{L} are not parallel and where multiple light sources are present. Finally, the modifications for the case of local light sources and cameras are discussed.

One feature of the present invention is the use of a two variable, polar coordinate system (angle coordinates) to represent vector orientations, instead of the conventional three variable, cartesian coordinate system. As noted above, the angle coordinates can be interpolated without altering the normalization of the corresponding vector, and they provide uniform coverage of vector orientations using linear interpolation methods. They also simplify specification of relative vector orientations. The angle coordinates are linearly related to orthogonal color variables that range between 0 and 1. The color variables reference color values in a precalculated color map in much the same way that texture variables reference texture values in a texture map.

For one embodiment of the invention, the angle coordinates of a normal vector are mapped to a two dimensional (2D) grid of color variables, and color values are assigned to pixels

from a color map that is referenced to the same color variable grid. The color map for this embodiment may contain light contributions from one or more light sources. For non-local light sources, angle coordinates specifying the relative orientation of the normal and light vectors are mapped to a one dimensional table of color variables, and color values are assigned to pixels from a one dimensional color map that is referenced to the same color variable table. The one dimensional color map represents light contributions from a single light source. One dimensional color maps for multiple light sources may be combined to form a 2D color map in which color values are referenced through a color variable and a light source identifier. In each case, the color mapping may be implemented using modified texture mapping techniques and hardware.

Fig. 3 illustrates angle coordinates suitable for representing the orientation of a vector, e.g. vertex normal N , in accordance with one embodiment of the present invention. In this coordinate system, L is a unit vector that is directed towards a light source. L , $L1$, and $L2$ form the basis vectors for a cartesian coordinate system 300 in which a normal N is specified. $S1$ is a vector representing the projection of N onto a plane formed by the L and $L1$ basis vectors ("L-L1 plane"). A first angular variable, α , is defined as the angle between N and $S1$. A second angular variable, β , is defined as the angle between $S1$ and $L1$. In the disclosed coordinate system, α ranges from 0 to $\pi/2$ and β to range from 0 to π .

For one embodiment, color variables u_c and v_c are related to α and β through the following relationships:

$$u_c = \begin{cases} .5 - \alpha / \pi & \text{if } (\mathbf{N} \bullet \mathbf{L}_2) \geq 0 \\ .5 + \alpha / \pi & \text{if } (\mathbf{N} \bullet \mathbf{L}_2) < 0 \end{cases} \quad \text{Eq. 2a}$$

$$v_c = \begin{cases} \beta / \pi & \text{if } (\mathbf{N} \bullet \mathbf{L}) \geq 0 \\ 1 - \beta / \pi & \text{if } (\mathbf{N} \bullet \mathbf{L}) < 0 \end{cases} \quad \text{Eq. 2b}$$

A color map for this case ($\mathbf{L} = \mathbf{V}$, light source at infinity) may be precalculated in terms of the color variables as follows:

$$C(u_c, v_c) = M_d L_d \Omega_L(u_c, v_c) + M_s L_s \Omega_H(u_c, v_c)^A \quad \text{Eq. 3}$$

Here, $\Omega_L(u_c, v_c)$ and $\Omega_H(u_c, v_c)$ are functions of color variables, u_c and v_c , representing a range of normal orientations. For the above example, where \mathbf{L} and \mathbf{H} are parallel, $\Omega_L(u_c, v_c)$ and $\Omega_H(u_c, v_c)$ are equal and are the orientation-dependent portion of Eq. 3 becomes $(M_d L_d + M_s L_s) \Omega(u_c, v_c)$, where $\Omega(u_c, v_c)$ is given by:

$$\Omega(u_c, v_c) = \cos[\pi(.5 + u_c)] \sin[2\pi v_c] = \sin[\pi u_c] \sin[2\pi v_c]. \quad \text{Eq. 4}$$

Here, the subscript has been dropped from Ω . Fig. 4 shows color maps 400, 401, 402, 403 calculated using Eq. 4 with different values of the specular exponent A . In accordance with the present invention, color maps 400-403 are precalculated and referenced through color variables u_c and v_c .

In order to assign color values from, e.g., color map 400 to the pixels representing the illuminated object, color variables are determined for each pixel of the component polygons. The starting point for determining pixel color variables for a given polygon is the angle coordinates α, β of the polygon's vertex normals. Vertex values of the angle coordinates may be determined using standard transformation techniques, as discussed below in greater detail.

During rendering, angle coordinates α , β are generated for each pixel from the corresponding vertex normal values. The angle coordinates α , β for each pixel are then converted to color variables u_c , v_c , and a corresponding color value is provided from color map 400.

Illumination data related to other vectors quantities may be readily accommodated in color map 400. For example, when \mathbf{V} and \mathbf{L} are not parallel, the orientation function, $\Omega_H(u_c, v_c)$ differs from $\Omega_L(u_c, v_c)$ and must be determined independently. The orientation of \mathbf{H} in the coordinate system of Fig. 3 may be specified by angular coordinates, α_H , β_H (or corresponding color variables u_{cH} , v_{cH}), and the corresponding orientation function is given by:

$$\Omega_H(u_c, v_c) = \sin[\pi(u_c - u_{cH})] \sin[2\pi(v_c - v_{cH})]. \quad \text{Eq. 5}$$

Since u_{cH} and v_{cH} are constants for a given illumination/viewing geometry, the sum of $M_s L_s \Omega_H(u_c, v_c)$ and $M_d L_d \Omega_L(u_c, v_c)$ be referenced through the same color variables to form a color map for the case where \mathbf{L} and \mathbf{H} are not parallel.

Similarly, where multiple light sources are present, the orientation of each additional light source, L_i , may be specified through angle coordinates, α_{Li} , β_{Li} (or their corresponding color variables, u_{cLi} , v_{cLi}). Diffuse terms for each additional light source may then be incorporated into color map 400 through a corresponding orientation function, $\Omega_{Li}(u_c, v_c)$, in which u_c , v_c , are offset by constant color variables, u_{cLi} , v_{cLi} as in Eq. 5. Specular terms for each additional light source $\Omega_{Hi}(u_c, v_c)$ may be similarly incorporated for each L_i that is not parallel to \mathbf{H} .

One shortcoming of the coordinate system of Fig. 3 is that close normals may not correspond to close color texture coordinates. For example, if the viewing direction (\mathbf{V}) corresponds to color variables near the edge of color map (Fig. 3), small changes in the viewing

direction of the object may result in large changes in the color variables for normals on opposite sides of the origin (e.g. $\beta = 0$). This can create a discontinuous appearance in those regions of the object that correspond to extreme color variables of the color map.

One method for addressing these discontinuities is to employ a coordinate system in which the defects, e.g. discontinuities, are on polygons on the side of the object opposite to that being viewed, independent of the location of the light source(s). This may be accomplished, for example, in a coordinate system in which the normal angles are defined relative to the camera (viewer) direction rather than light source direction. In Fig. 3, this means that \mathbf{L} is replaced by \mathbf{V} , and the angle coordinates α, β refer to the direction of a normal or a light source, \mathbf{L}_i , with respect to \mathbf{V} .

As in the discussion of color map 400, a color map in the camera-fixed coordinate system is generated by sampling a range of normal orientations specified by, e.g., angle coordinates, α, β . The set of sampled normals defines a unit sphere. The hemisphere visible to the viewer is mapped to a planar grid as follows:

$$\begin{aligned} u_c &= \alpha / \pi \\ v_c &= \beta / \pi \end{aligned} \quad \text{Eq. 6}$$

For one embodiment, the 2D color map or table includes diffuse lighting contributions from all light sources as a function of normal orientations specified by u_c, v_c . For specular lighting purposes, it is assumed that the central element of the 2D table ($1/2, 1/2$) represents a normal pointing directly into the camera. Thus, \mathbf{H} can be established and specular contributions can be determined and added for all lights.

During rendering, the orientation of a pixel normal is interpolated from vertex values of α , β , and converted to color variables u_c , v_c . The pixel color value is provided by the entry in the 2D table referenced by u_c , v_c . It is noted that since each pixel is treated independently, there are likely to be parallax errors, and pixels in shadow may be lit as if they were not in shadow.

5 A color map for multiple, non-local lights illuminating a polygon characterized by one set of material properties in the viewer-referenced coordinate system is calculated as follows:

$$C^1[u_c, v_c] = \sum_{j=0}^{N-1} \left(M_{aj} L_{aj} + M_{dj} L_{dj} \left(\mathbf{N}_x[u_c, v_c] \bullet \mathbf{L}_j \right) + M_{sj} L_{sj} \left(\mathbf{N}_x[u_c, v_c] \bullet \mathbf{H}_j \right)^4 \right)$$

Eq. 7a

$$C^2[u_c, v_c] = \sum_{j=0}^{N-1} \left(M_{aj} L_{aj} + M_{dj} L_{dj} \left(\mathbf{N}_y[u_c, v_c] \bullet \mathbf{L}_j \right) + M_{sj} L_{sj} \left(\mathbf{N}_y[u_c, v_c] \bullet \mathbf{H}_j \right)^4 \right)$$

Eq. 7b

Here, L_j and H_j are the light source and halfway vectors for light source (j) in the viewer-referenced coordinate system. For one embodiment of the present invention, $N_x[u_c, v_c]$ and $N_y[u_c, v_c]$ are a set of vectors that sample a range of orientations with respect \mathbf{V} . $N_x[u_c, v_c]$ and $N_y[u_c, v_c]$ are given by the following equations:

$$\mathbf{N}_x[u_c, v_c] = \begin{pmatrix} x_u \\ y_v \\ \sqrt{1 - x_u^2 - y_v^2} \end{pmatrix} \text{ if } (x_u^2 + y_v^2) < 1 \quad \text{Eq. 8a}$$

$$\mathbf{N}_x[u_c, v_c] = \begin{pmatrix} \frac{x_u}{\sqrt{x_u^2 + y_v^2}} \\ \frac{y_v}{\sqrt{x_u^2 + y_v^2}} \\ 0 \end{pmatrix} \text{ otherwise} \quad \text{Eq. 8b}$$

$$\mathbf{N}_y[u_c, v_c] = \begin{pmatrix} \frac{x_u}{1 - x_u^2 - y_v^2} \\ -y_v \\ 0 \end{pmatrix} \text{ if } (x_u^2 + y_v^2) < 1 \quad \text{Eq. 9a}$$

$$\mathbf{N}_y[u_c, v_c] = \begin{pmatrix} \frac{x_u}{\sqrt{x_u^2 + y_v^2}} \\ \frac{y_v}{\sqrt{x_u^2 + y_v^2}} \\ 0 \end{pmatrix} \text{ otherwise} \quad \text{Eq. 9b}$$

In this embodiment, the color variables, u_c, v_c are related to x_u, y_v as follows:

$$x_u = 2u_c - 1 \quad \text{Eq. 10a}$$

$$y_v = 2v_c - 1 \quad \text{Eq. 10b}$$

The color map consists of the set of color values $C^1[u_c, v_c]$ and $C^2[u_c, v_c]$ for color variables u_c, v_c between 0 and 1. The geometry intensive calculations of Eqs. 7a and 7b, are precalculated,

e.g. prior to rendering, for each object that has the same lighting, camera, and material characteristics.

Figs. 5A and 5B are color maps, C^1 and C^2 , respectively, for the following material and light source characteristics for red, green, and blue (RGB) wavelengths:

$$M_a = (0.15, 0.03, 0.12)$$

$$M_d = (0.7, 0.12, 0.40)$$

$$M_s = (1.0, 1.0, 1.0)$$

$$A_{\text{mat}} = 40$$

$$L_a(0) = L_d(0) = L_s(0) = (1, 1, 1) \text{ (white light)}$$

$$L_a(1) = L_d(1) = L_s(1) = (0, 0, 1) \text{ (blue light)}$$

M_a , M_d , and M_s are material RGB color vectors for ambient, diffuse, and specular light, A_{mat} is the specular exponent of the material, and $L_a(j)$, $L_d(j)$, and $L_s(j)$ are RGB color vectors for light source (j).

Figs. 5C and 5D are color tables C^1 and C^2 for the following material and light source RGB characteristics:

$$M_a = (0.12, 0.09, 0.03)$$

$$M_d = (0.4, 0.37, 0.06)$$

$$M_s = (1.0, 0.80, 0.30)$$

$$A_{\text{mat}} = 40$$

$$L_a(0) = L_d(0) = L_s(0) = (1, 1, 1) \text{ (white light)}$$

$$L_a(1) = L_d(1) = L_s(1) = (0, 0, 1) \text{ (blue light).}$$

$$L_a(2) = L_d(2) = L_s(2) = (0, 1, 0) \text{ (green light)}$$

$$L_0 = (1, 1, -1), L_1 = (-1, -1, -1), L_2 = (1, -1, -1).$$

Once the color map is calculated for given light source(s) and viewing geometry, angle

5 coordinates are generated for the vertex vectors (**N**, **L**, **H**) of each polygon in the viewer-fixed coordinate system. Angle coordinates for pixel normals are then generated by interpolation from the vertex values and converted to corresponding color variables. Color values for the pixels may then be read from the color map through a relatively fast look-up operation.

For one embodiment of the present invention, vertex values of the angular coordinates in the viewer-fixed coordinate system are generated as follows. Let $\mathbf{M} = \{M_{mn}\}$ represent a model view matrix for the object that is being imaged, and n_{xi} , n_{yi} , n_{zi} represent the x, y, and z components of the normal vector of the i^{th} vertex of a polygon (\mathbf{n}_i). The model view matrix is the matrix that transforms the coordinates of points in the object from an object-fixed coordinate system (model coordinate system) to a camera-fixed coordinate system (view coordinate system). In the latter coordinate system, **V** is parallel to the z axis, and the x and y axes are in the plane of the computer monitor. In this embodiment, a normalized vertex normal **m** in the camera-fixed coordinate system is given by:

$$\mathbf{m} = \frac{\mathbf{M} \bullet \mathbf{n}}{\|\mathbf{M} \bullet \mathbf{n}\|} \quad \text{Eq. (11)}$$

The color variables of the i^{th} vertex normal in this coordinate system are:

$$u_{ci} = m_{xi}, v_{ci} = m_{yi}, w_{ci} = m_{zi} \quad \text{Eq. (12)}$$

The color variables for the polygon pixels may be generated from $\{m_{xi}, m_{yi}, m_{zi}\}$ using standard interpolation methods. These methods are described, for example, in Foley, van Dam, Feiner, and Hughes, *Computer Graphics Principles and Practice*, Addison Wesley, Reading Massachusetts (1996).

5 In the disclosed embodiment of the invention, the color value for a pixel is provided from color map C^1 or C^2 , depending on the interpolated value of m_z . A color value is assigned to the pixel from C^1 when $m_z \geq 0$, and a color value is assigned to the pixel from color table C^2 when $m_z < 0$. C^2 is included in the discussion for completeness, since pixels that are mapped to color map C^2 are not visible when the object is transformed to the camera coordinate system described above.

10 Figs. 6A-6E show a series of images generated using the method of the present invention. For comparison, the same images generated using Gouraud shading and Phong shading are shown adjacent to them. The method of the present invention allows the figures to be generated in approximately the same amount of time as required for the Gouraud shaded object, and in much shorter times than required for the Phong object. The images in Figs. 6A-6E generated by the present invention have highlights that are superior to those of the corresponding Gouraud shaded images and comparable to those achieved using the far more expensive Phong shading technique.

15 Local lights are not readily treated with the color maps described above, since the orientation of the light source vector varies with pixel position in the polygon. Color maps in which only normal vector orientations are sampled, e.g. Figs 4 and 5, are inadequate when the light vector varies as well. Color maps that sample both normal and light vector orientations are

expensive to calculate and require four color variables to reference one color value. Since the color value depends only on the relative orientation of N and L (when L and V are parallel), the computational cost of the four parameter color map unnecessary. The use of four color variables also eliminates the parallels with texture mapping provided by the present invention.

5 For one embodiment of the present invention, local lights are treated using a one dimensional color map for each local light source. Returning to Fig. 4, it is evident from the symmetry of color map 400 that a significant amount of redundant information is present. This follows from the fact that the only angle of significance in Eq. (4) when L and V are parallel is the angle γ between L and N (Fig. 3). For example, Eq. 4 for $\Omega(u_c, v_c)$ is equivalent to:

$$\text{Cos } \gamma = \text{Cos } \alpha \bullet \text{Sin } \beta. \text{ Eq. 13}$$

A corresponding 1D color map may be generated from Eq. 8, with $\Omega(u_c, v_c) = \text{Cos } \gamma$.

Color values can not be determined unambiguously by interpolating γ because vector orientations require two angles to be fully specified. However, angle coordinates α and β can be interpolated for each vector of interest, and γ (or some function of γ) can be generated using Eq 12. Color values may be accessed from the one dimensional color map through γ or a corresponding color variable. For multiple local light sources, a one dimensional color map may be generated for each light source/material combination, with color values referenced by a corresponding color variable. The set of one dimensional color maps may be combined into a single two dimensional color map, with color values indexed by a color variable and light source 20 ID. Since the composite color map is 2 dimensional, it is readily accommodated into the color (texture) mapping framework of the present invention.

Fig. 7 shows a reference coordinate system defining angle coordinates α_1, β_1 and α_2, β_2 specifying the orientations of **N** and **L**, respectively, across a polygon. A similar approach applies to determining the relative orientation of **N** and **V** for the specular component of Eq. (1). In the disclosed coordinate system, **Z** is one of the basis vectors and **Y** is an axis that is perpendicular to **Z**. **S**₁ represents the vector formed by projecting **N** onto the **Z, Y** plane and α_1 is the angle between **N** and the **Z, Y** plane. **S**₁ also makes an angle β_1 with the **Y** coordinate axis in the **Z, Y** plane. Similarly, **S**₂ represents the vector formed by projecting **L** onto the **Z, Y** plane, α_2 is the angle between **L** and the **Z, Y** plane, and β_2 is the angle between **S**₂ and the **Y** coordinate axis in the **Z, Y** plane.

Using the reference coordinate system of Fig. 7, and the angle pairs α_1, β_1 and α_2, β_2 , the vertex orientation of **N** and **L** may be specified unambiguously and interpolated to generate angle pairs $\alpha_1(s,t), \beta_1(s,t)$ and $\alpha_2(s,t), \beta_2(s,t)$, respectively, for pixels at locations (s, t). At each pixel location (s,t), angle pairs $\Delta\alpha(s,t) (= \alpha_1(s,t) - \alpha_2(s,t))$ and $\Delta\beta(s,t) (= \beta_1(s,t) - \beta_2(s,t))$ are determined. Since $\Delta\alpha(s,t)$ and $\Delta\beta(s,t)$ are perpendicular to each other, $\cos \gamma$ is given by $\cos \Delta\alpha \sin \Delta\beta$, per Eq. 12.

Where both local and non-local light sources are present, a single color map may be determined for all non-local light sources in the manner described above, and a separate color map may be provided for each local light source. In each case, the color maps are precalculated for a sample of color variables and referenced according to the color variables. Color contributions for each pixel are then determined by interpolating the angle coordinates for each pixel in a polygon from the vertex values, determining corresponding color variables, and assigning the referenced color values from the appropriate color map.

The parallels between the present invention and texture mapping allows per-pixel shading to be implemented using standard, textures mapping hardware without perspective correction. In the present invention, the color map corresponds to the texture map that is being mapped to a polygon surface, and orientation parameters u_c , v_c that reference color values in the color map correspond to the texture coordinates u_T , v_T that reference texture values in the texture map. Where the graphics system supports more than one pipeline, per-pixel shading in accordance with the present invention can be carried out in parallel with texture mapping.

Fig. 8 is a block diagram indicating how the per-pixel shading method of the present invention may be implemented using texture mapping hardware available in most graphics systems. For purposes of illustration, each polygon vertex has associated color variables, u_c , v_c , w_c , corresponding to the angle coordinates of vertex vectors **N**, **L**, and **H**, as required by the particular illumination model, geometry, and simplifying assumptions. These parameters may be determined in the geometry stage of the graphics pipeline or, in the case of the normal vectors, specified in a model. Each polygon vertex is also shown having associated texture variables u_t , v_t , and w_t for the case where texture mapping is implemented.

Color variables $u(s,t)_c$, $v(s,t)_c$, $w(s,t)_c$, are generated for each pixel location from the vertex values using the interpolation methods discussed above or their equivalents. The interpolated orientation parameters of a pixel are then used to access a color value stored in color map 820. The color value is provided to a color combining module 830 for further processing. Depending on the mix of local and non-local light sources, color values may be provided from different color maps 820.

Similarly, texture variables $u(s,t)_i$, $v(s,t)_i$, and $w(s,t)_i$ at pixel location s, t are generated from the vertex texture values, using standard interpolation methods. The interpolated texture values are then used to access texture data from texture map 840. The accessed texture map values are then provided to color combining module 830. Color combining module 830 receives per-pixel shading and texture data from color map(s) 820 and texture map 840 and combines the received shading and texture data into a suitable shading value for the pixel.

The per-pixel shading method of the present invention may also serve as the basis for an efficient approach to bump mapping. This approach to bump mapping employs a perturbation source, such as a mathematical function, an algorithm, or a bump map, to alter the angle coordinates (or color variables) of pixel normals before referring to the color map(s). For one embodiment of the invention, the perturbation source generates orientation perturbations, $\Delta\alpha$, $\Delta\beta$, that may be combined with the angle coordinates of a pixel to generate "perturbed angle coordinates". The perturbed angle coordinates are converted to color variables, which reference color values representing the perturbed normal orientation.

Fig. 9 is a block diagram of a system 900 for implementing bump mapping in accordance with the present invention for the case in which the perturbation source is a bump map. System 900 includes a bump map 910, a perturbation generator 920, a color map 930, and a color combining module 940. Also shown is an optional texture map 950. Color map 930 and color combining module 940 are substantially as shown and described in conjunction with Fig. 8.

Bump map 910 is a precalculated set of orientation perturbation values ($\Delta\alpha$, $\Delta\beta$) that are referenced through bump coordinates, P_u , P_v , P_w . P_w is shown in parenthesis since it is used only when perspective correction is to be included.

Pixel values of the bump coordinates are interpolated from vertex values of the bump coordinates during rendering. A bump value ($\Delta\alpha$, $\Delta\beta$) referenced by the interpolated bump coordinates is provided from bump map 910 for combination with the angle coordinates of the pixel. The perturbed angle coordinates are converted to color variables and the corresponding color values are provided by the color map.

In the embodiment of Fig. 9, perturbation generator 920 combines bump values ($\Delta\alpha$, $\Delta\beta$) with angle coordinates (α , β) for a pixel to generate perturbed angle coordinates ($\alpha' = \alpha + \Delta\alpha$, $\beta' = \beta + \Delta\beta$). The perturbed angle coordinates are converted to color variables, which are then used to look up a color value in color map 930. The resulting color value is suitable to the perturbed orientation of the pixel's normal vector. As shown in Fig. 9, texture values may also be provided for a pixel from texture map 950 and combined with the color values from color map 930 by color combining module 940.

As noted above, sources other than a bump map may be used to provide the perturbations of the pixel normals. For example, one algorithm for generating perturbations computes the gradient of the color values for an image and converts the gradient to a bump value. Bump values may be generated and added to angle coordinates on the fly or they may be stored to a bump map and combined with angle coordinates on a subsequent pass through the image.

Fig. 10 shows images 1010 generated by applying the bump mapping method of the present invention. The image on the left is generated using the pixel color values of the central image for the altitudes (bumps) of its corresponding pixels. The image on the right is generated using color-weighted altitudes (linear combinations of the RGB values) derived from the pixel

color values of the central image. Fig. 11 shows a series of images in which microrelief has been added using the bump-mapping method of the present invention.

There has thus been provided a per pixel shading system that is suitable for use in real time interactive graphics systems. Color values are precalculated for a sample of normal vector orientations specified by pairs of polar angle coordinates. The color values are collected in a color map and referenced by angle coordinates that have been scaled to a range of between 0 and 1 (scaled angle coordinates or color variables). Values of the angle coordinates are determined for the vertices of each polygon used to model the object to be shaded. During rendering, pixel angle coordinates are determined by interpolating angle coordinates from the vertex values. Bump features are generated by combining angle perturbations with the interpolated angle coordinates to generate modified angle coordinates. The angle perturbations for a pixel may be determined by interpolation from vertex values. The modified angle coordinates are converted to color variables, and a color value referenced by the color variables is assigned to the pixel. The method may be readily implemented using standard texture mapping hardware.

We claim:

1 1. A method for implementing bump mapping, comprising the steps of:
2 generating a table of color values referenced by orientation-dependent color
3 variables;
4 estimating angle coordinates for a pixel in a polygon;
5 modifying the estimated angle coordinates, using a perturbation source
6 converting the modified angle coordinates to one or more color variable; and
7 assigning the pixel a color value according to the one or more color variables.

1 2. The method of claim 1, wherein modifying the estimated angle coordinates includes:
2 generating angle perturbations; and
3 adding the angle perturbations to the angle coordinates.

1 3. The method of claim 2, wherein generating angle perturbations comprises:
2 estimating a bump variable for the pixel; and
3 converting the bump variable to angle perturbations.
4

1 4. The method of claim 3, wherein converting the perturbation variable comprises retrieving
2 angle perturbations from a bump map location referenced by the perturbation variable.

1 5. The method of claim 1, wherein estimating angle coordinates comprises:
2 determining angle coordinates for normal vector orientations at vertices of the
3 polygon;
4 interpolating angle coordinates for the pixel from the determined angle
5 coordinates.

1 6. The method of claim 3, wherein estimating the perturbation variable comprises:
2 determining perturbation variables for vertices of the polygon;
3 interpolating perturbation variables for the pixel from the determined vertex
4 perturbation variables.

1 7. A graphics system comprising:
2 a geometry engine to associate vector orientation data with vertices of one or more
3 polygons representing an object in an image;
4 a color map including color values for a sample of vector orientations, each color
5 value being referenced by one or more orientation dependent color variables;
6 a perturbation source to provide orientation perturbations; and
7 a rendering engine to convert vertex data for each polygon to angle and
8 perturbation coordinates for each pixel in the polygon, generate one or more perturbed

9 color variables using the angle and perturbation coordinates, and assign a color value to
10 each pixel according to its one or more color variables.

1 8. The graphics system of claim 7, wherein the orientation-dependent color variables are
2 linearly related to angle coordinates that specify the sampled vector orientations.

1 9. The graphics system of claim 7, wherein the perturbation source is a bump map
2 including angle perturbations referenced by the perturbation coordinates.

0 10. The graphics system of claim 9, wherein the rendering engine includes a generator that
1 combines the angle coordinates and angle perturbations into perturbed color coordinates.
2

0 11. The graphics system of claim 7, wherein the perturbation source is an algorithm for
1 associating perturbations with polygon locations according to a property of the image.
2

1 12. A machine readable medium on which are stored instructions that are executable by a
2 system to implement a method for assigning a color value to an image pixel, the method
3 comprising:

4 generating color values for a sample of normal vector orientations, each color
5 value being associated with one or more scaled angle coordinates representing a
6 corresponding normal vector orientation;

estimating one or more angle coordinates for the pixel;
perturbing the one or more angle coordinates to provide modified angle
coordinates; and
retrieving a color value for the pixel according to the perturbed angle variables.

13. The machine readable medium of claim 12, wherein perturbing comprises:

generating angle perturbations for the pixel; and
combining the angle perturbations with the angle coordinates to form modified
angle coordinates.

14. The machine readable storage medium of claim 12, wherein estimating comprises:

interpolating angle coordinates for the pixel from angle coordinates for the
polygon vertices; and
converting the interpolated angle coordinates to scaled angle coordinates.

15. A graphics system comprising:

means for associating vector orientation data with vertices of one or more
polygons representing an object in an image;
means for indicating color values for a sample of vector orientations, each color
value being referenced by one or more orientation dependent color variables;

6 means for providing orientation perturbations; and
7 means for converting vertex data for each polygon to angle and perturbation
8 coordinates for each pixel in the polygon; and
9 means for combining angle and perturbation coordinates to provide a color value
10 for each pixel through perturbed color variable.

1 16. The graphics system of claim 15, wherein the providing means is a bump map including
2 angle perturbations referenced by the perturbation coordinates.

3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000

17. The graphics system of claim 16, wherein the combining means includes a generator that combines the angle coordinates and angle perturbations into perturbed color coordinates.

EXTENSION OF FAST PHONG SHADING TECHNIQUE FOR BUMP MAPPING

Abstract of the Disclosure

A method for implementing bump mapping is provided that is fast enough to be used with real time interactive graphics products. Computationally expensive color values are precalculated for a sample of normal vector orientations as a function of orientation-dependent color variables, collected in a color map, and referenced through the color variables. The color variables are linearly related to angle coordinates that specify the normal vector orientations in a selected coordinate system. Angle coordinates are determined for the vertices of the polygons representing the object to be imaged. During rendering, the vertex angle coordinates are interpolated to provide pixel angle coordinates. Modified angle coordinates are generated by combining the angle coordinates with angle perturbations provided by a perturbation source, and converted to color variables. Color values referenced by the color variables are assigned to the corresponding pixels.

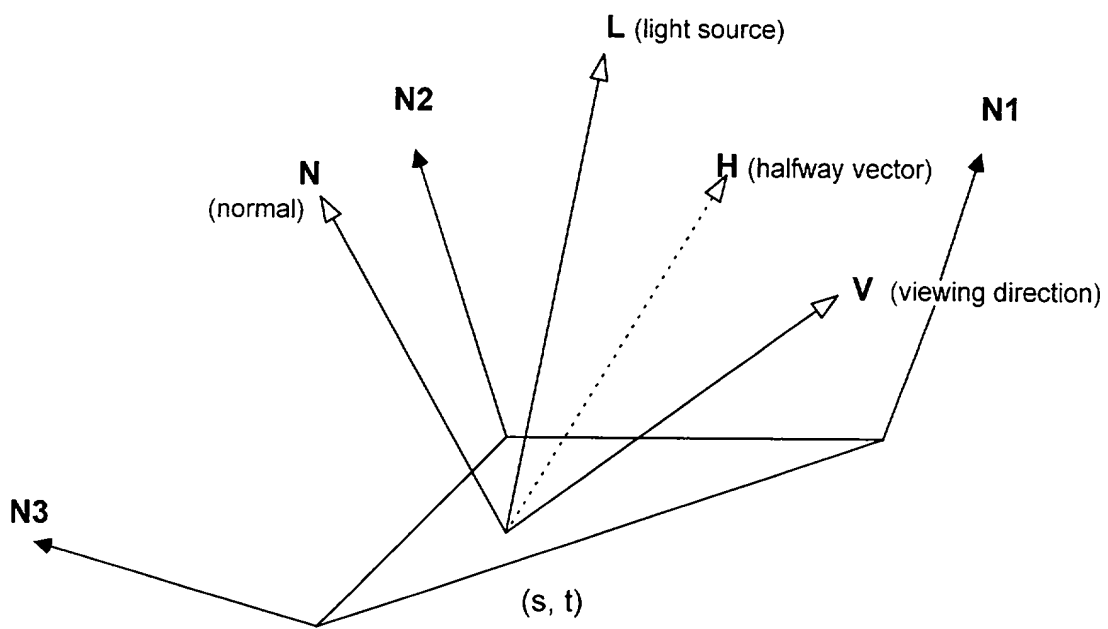
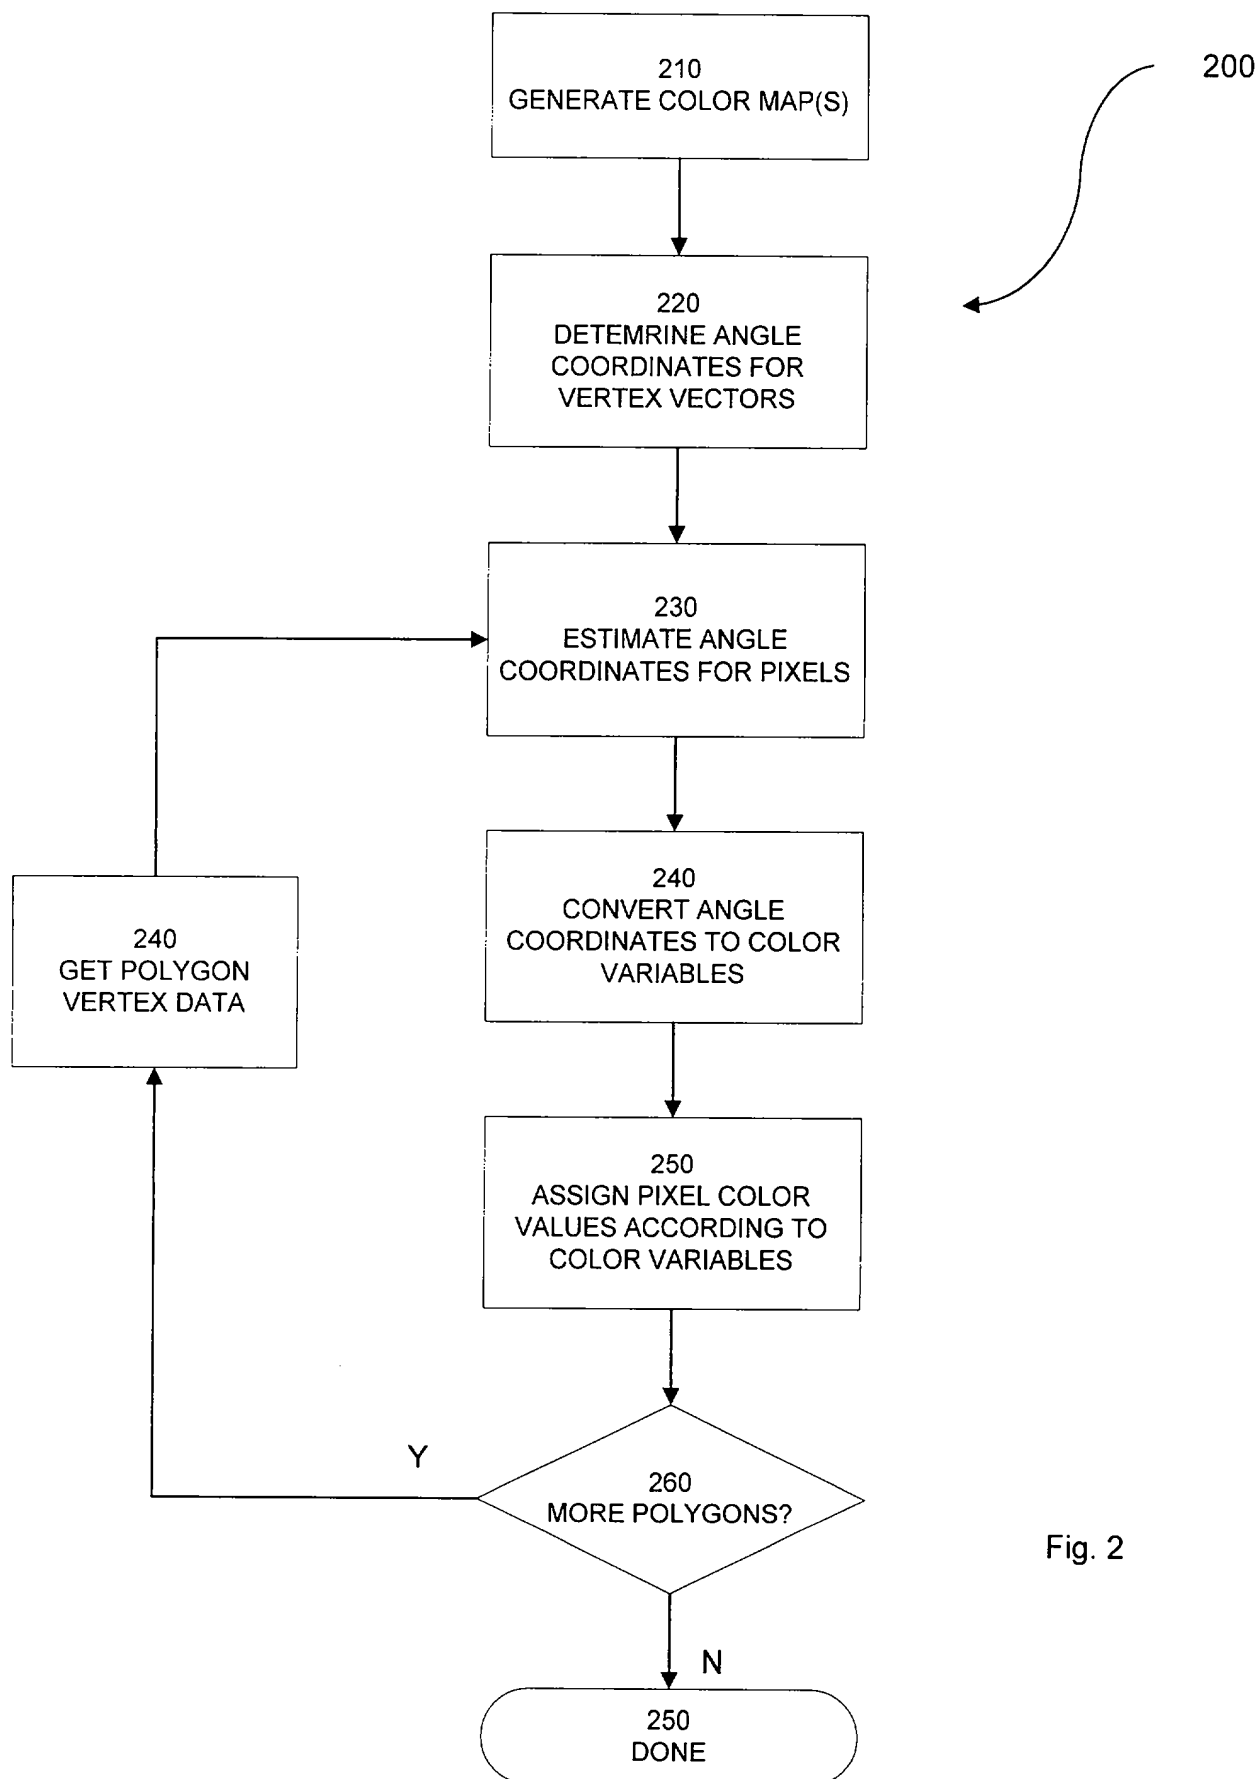


Fig. 1



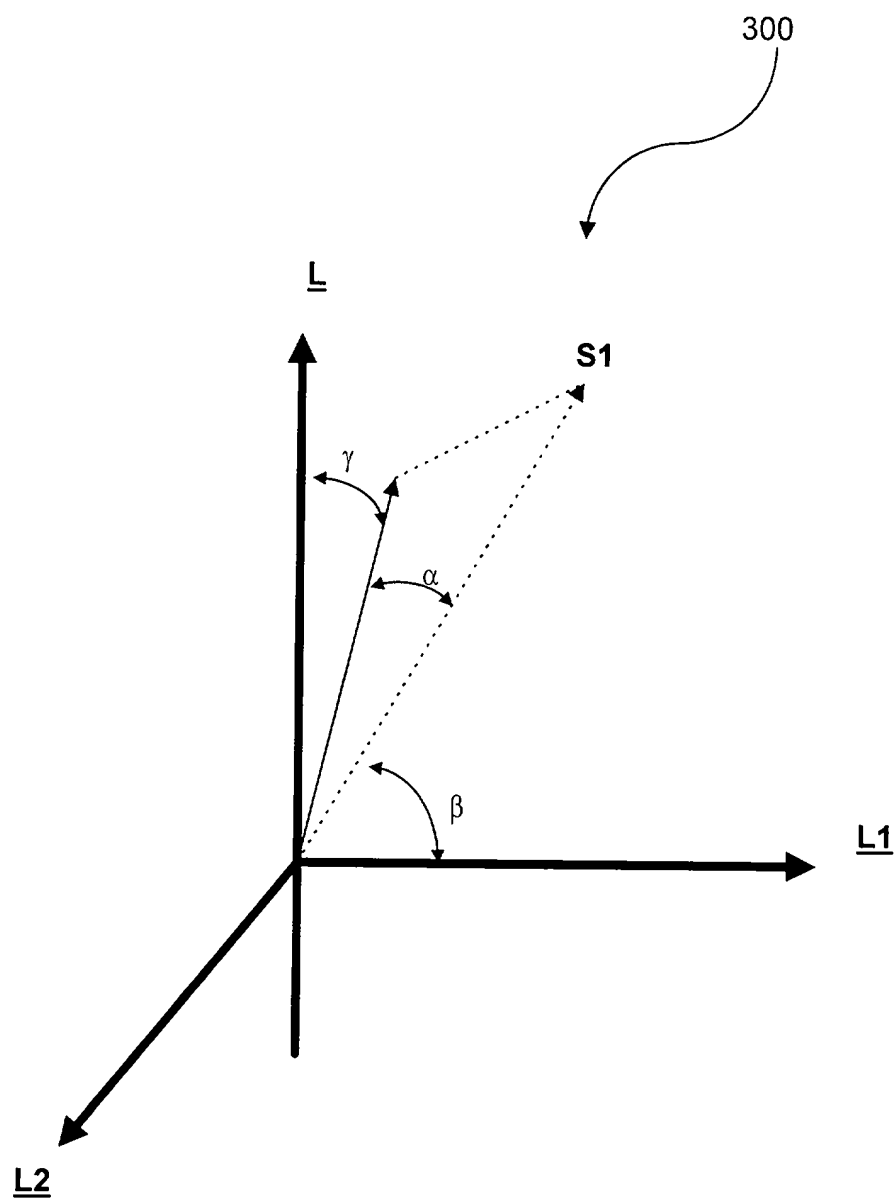


Fig. 3

862F20 5469460

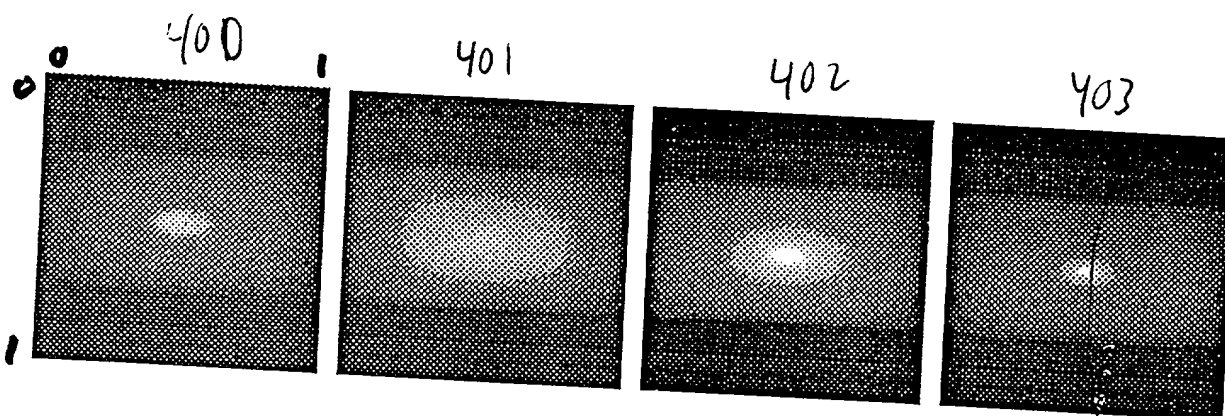


Figure 4

062720 5458160

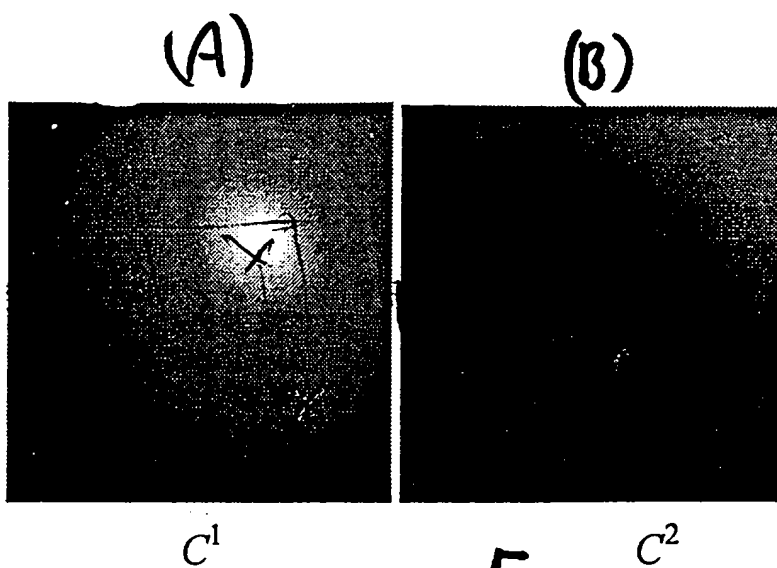


Figure 5



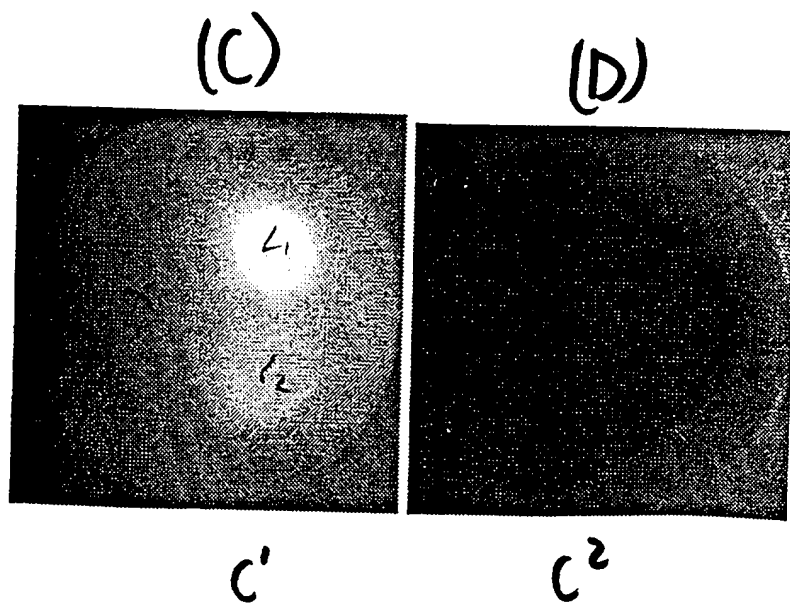



Fig. 6A



Gouraud Shading




Phong Shading




Fedor Shading


Fig. 6B



Gouraud Shading



Phong Shading



Fedor Shading


Fig. 6C



Gouraud Shading




Phong Shading




Fedor Shading


Fig. 6D



Gouraud Shading






Phong Shading



Fedor Shading

Fig. 6E



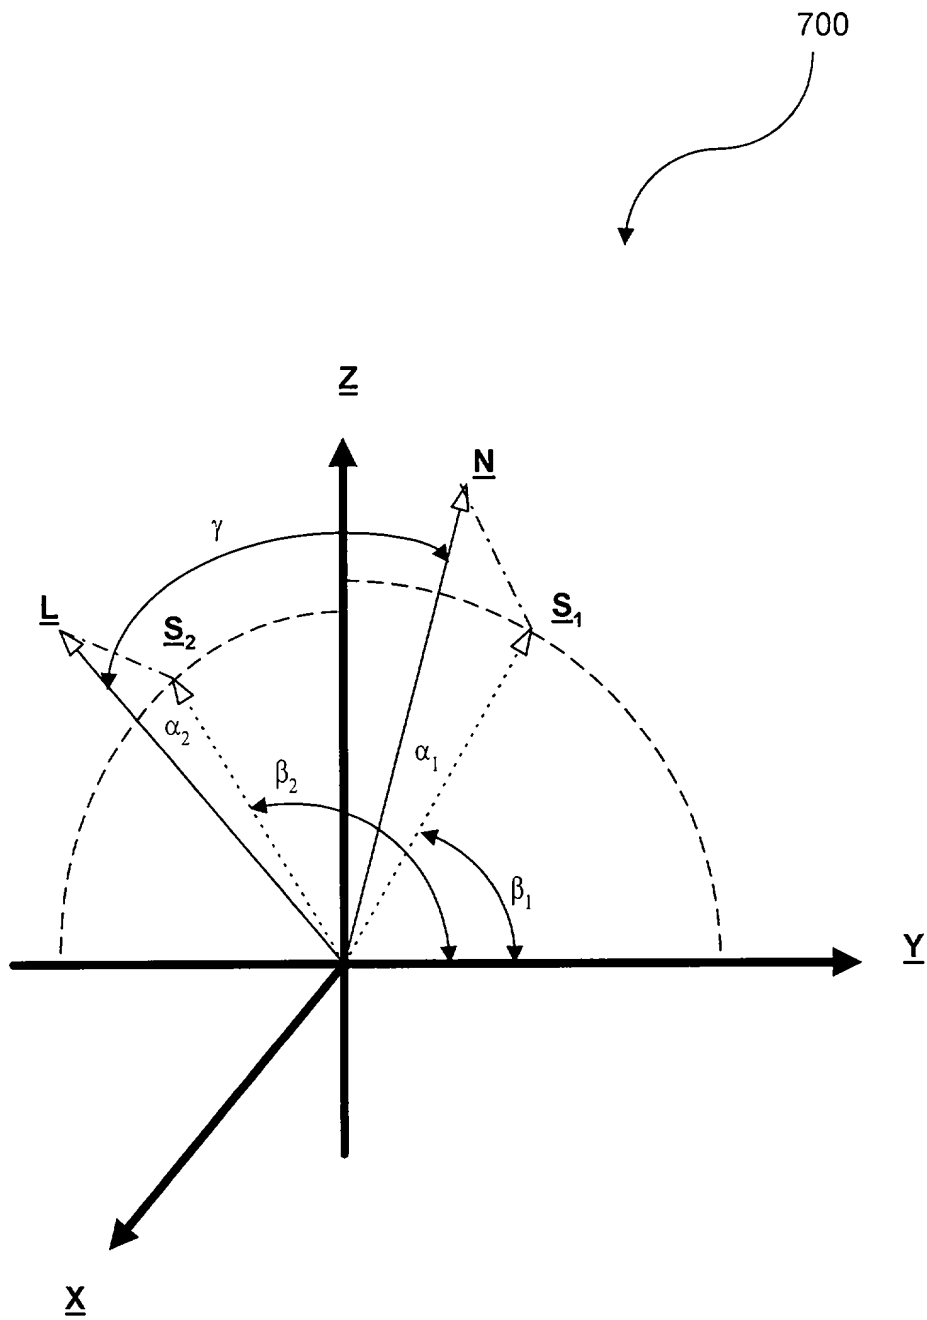


Fig. 7

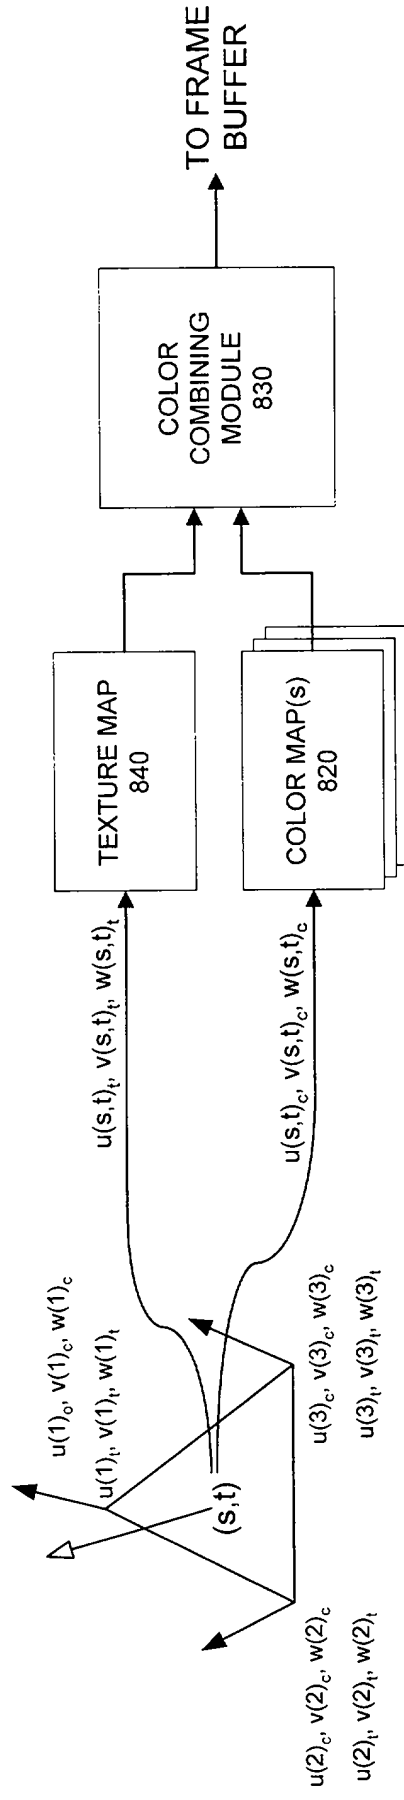


Fig. 8

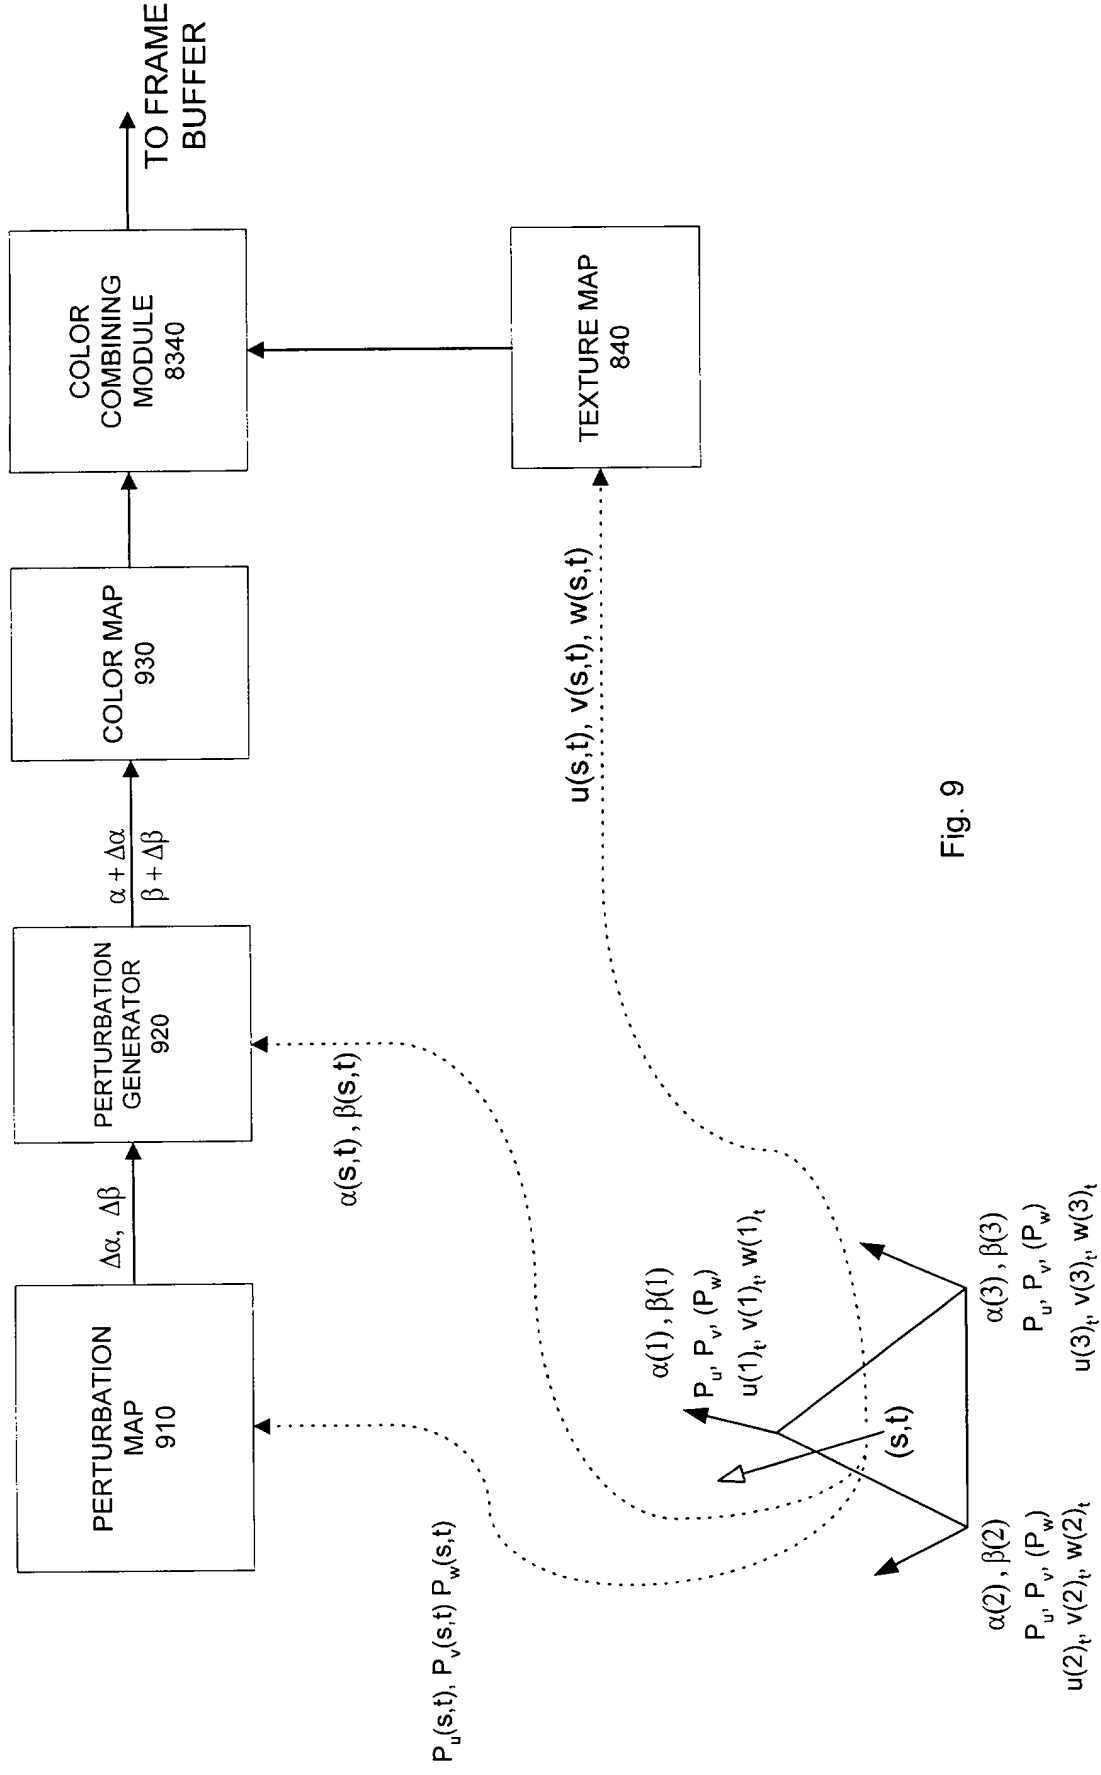


Fig. 9



Fig. 10

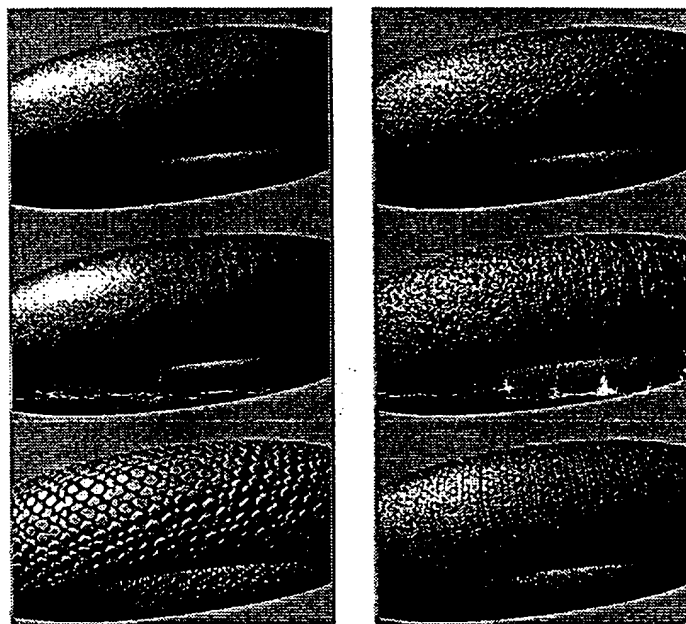


Fig. 11

DECLARATION AND POWER OF ATTORNEY FOR PATENT APPLICATION
(FOR INTEL CORPORATION PATENT APPLICATIONS)

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am an original, first, and joint inventor of the subject matter which is claimed and for which a patent is sought on the invention entitled

EXTENSION OF FAST PHONG SHADING TECHNIQUE FOR BUMP MAPPING

the specification of which

X
_____ is attached hereto.
_____ was filed on _____ as
United States Application Number _____
or PCT International Application Number _____
and was amended on _____
(if applicable)

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claim(s), as amended by any amendment referred to above.

I acknowledge the duty to disclose all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, Section 119(a)-(d), of any foreign applications for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

			Priority Claimed	
(Number)	(Country)	(Day/Month/Year Filed)	Yes	No
(Number)	(Country)	(Day/Month/Year Filed)	Yes	No
(Number)	(Country)	(Day/Month/Year Filed)	Yes	No

I hereby claim the benefit under title 35, United States Code, Section 119(e) of any United States provisional application(s) listed below

(Application Number)	Filing Date
----------------------	-------------

(Application Number)	Filing Date
----------------------	-------------

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, Section 112, I acknowledge the duty to disclose all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application:

(Application Number)	Filing Date	(Status—patented, pending, abandoned)
----------------------	-------------	--

I hereby appoint Aloysius T. C. AuYeung, Reg. No. 3S,432; William Thomas Babbitt, Reg. No. 39,591; Jordan Michael Becker, Reg. No. 39,602; Bradley J. Bereznak, Reg. No. 33,474; Michael A. Bernadicou, Reg. No. 35,934; Gregory D. Caldwell, Reg. No. 39 926; Kent M. Chen, Reg. No. 39,630; Lawrence M. Cho, Reg. No. 39,942; Thomas M. Coester, Reg. No. P39,637; Roland B. Cortes, Reg. No. 39,152; William Donald Davis, Reg. No. 38,428; Daniel M De Vos, Reg. No. 37,813; David R. Halvorson, Reg. No. 33,395; Eric Ho, Reg. No. P39,711; George W Hoover II, Reg. No. 32,992; Eric S. Hyman, Reg. No. 30,139; Dag H. Johansen, Reg. No. 36,172; Stephen L. King, Reg. No. 19,180; Dolly M. Lee, Reg. No. 39,742; Kimberley G. Nobles, Reg. No. 38,255; Ronald W. Reagin, Reg. No. 20,340; James H Salter, Reg. No. 35,668, William W. Schaal, Reg. No. 39,018; Maria McCormack Sobrino, Reg. No. 31,639; Allan T. Sponseller, Reg. No. 38,318; Steven R. Sponseller, Reg. No. 39,384; Edwin H. Taylor, Reg. No. 25,129; Lester J. Vincent, Reg. No. 31,460; Ben J. Yorks, Reg. No. 33,609; Michael Anthony DeSanctis, Reg. No. 39,957; Charles E. Shemwell, Reg. No. 40,171; and Judith A. Szepesi, Reg. No. 39,393; of BLAKELY, SOKOLOFF, TAYLOR & ZAFMAN, with offices located at 12400 Wilshire Boulevard, 7th Floor, Los Angeles, California 90025, telephone (310) 207-3800, and Joseph R. Bond, Reg. No. 36,458; Richard C. Calderwood, Reg. No. 35,468, James E. Jacobson, Jr., Reg. No. 31,626; Leo V. Novakoski, Reg. No. 37,198; Naomi Obinata, Reg. No. 39,320; Thomas C. Reynolds, Reg. No. 32,488; and Raymond J. Werner, Reg. No. 34,752 of INTEL CORPORATION with full power of substitution and revocation, to prosecute this application and to transact all business in the Patent and Trademark Office connected herewith.

Send correspondence to Leo V. Novakoski, c/o BLAKELY, SOKOLOFF, TAYLOR
(Name of Attorney or Agent)

& ZAFMAN, 12400 Wilshire Boulevard, 7th Floor, Los Angeles, California 90025 and direct
telephone calls to Leo V. Novakoski, (408) 765-5334.
(Name of Attorney or Agent)

I hereby declare that all statements made herein of my own knowledge are true and that all
statements made on information and belief are believed to be true; and further that these
statements were made with the knowledge that willful false statements and the like so made are
punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States
Code and that such willful false statements may jeopardize the validity of the application or any
patent issued thereon.

Full Name of Sole/First Inventor James T. Hurley

Inventor's Signature _____ Date _____

Residence _____ Citizenship _____

Post Office Address _____

Full Name of Second/Joint Inventor Fedor A. Pletenev

Inventor's Signature _____ Date _____

Residence _____ Citizenship _____

Post Office Address _____

091905-0409